



Serrure mécanique à mortaiser monopoint À bec de cane à condamnation

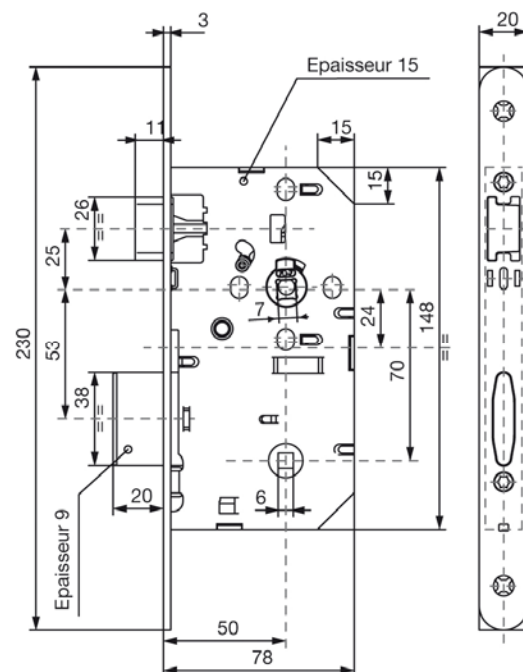

**ASSA ABLOY, le leader mondial des solutions d'ouverture de porte*

A detailed view of a mechanical component, likely a door handle or latch assembly. It features a metal plate with various holes and a black handle. The handle is mounted on the plate and has a cylindrical shape. The plate has several circular and rectangular holes, some of which are labeled with numbers like 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100. The plate is made of metal and has a brushed finish. The handle is made of black plastic or metal. The assembly is shown against a white background.

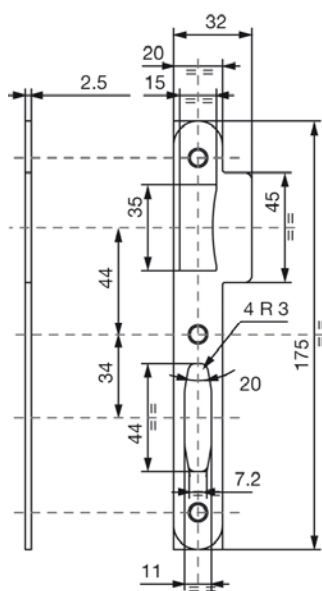

- Serrure réversible sans démontage
- Coffre en acier galvanisé
- Têtière en acier ou inox
- Pêne ½ tour en inox
- Pêne dormant oblong nickelé
- Entraxe 70 mm (72 mm sur demande)
- Fonction bec de cane à condamnation
- Trous de passage rosace au fouillot et au cylindre
- Carré de 7 mm (8mm avec axe à 120 mm)

Catégorie d'utilisation	Endurance	Masse de la porte	Résistance au feu	Sécurité des personnes	Résistance à la corrosion	Sécurité des biens	Domaine d'application de la porte	Type de manœuvre de clé et verrouillage	Type de manœuvre de la tige carrée	Identification de la clé
3	X	8	1	0	G	3	H	G	2	0

