

TS 77


—

Door Closer

THE BUDGET DOOR CLOSER FOR STANDARD DOORS

- The economical solution for standard doors.
- Non-handed, suitable for standard, parallel arm and frame installation.
- Fully controlled closing cycle.
- Backcheck version available for door and wall protection.

Functions



- 1 Fully controlled closing with adjustable speed between 180° - 20°
- 2 Adjustable latching action between 20° and 0°
- 3 Hold-open range if equipped with hold-open arm (optional extra)

Data and features		TS 77		
Closing force	Size	EN 2	EN 3	EN 4
Standard doors	850 mm	●	–	–
	950 mm	–	●	–
	≤ 1100 mm	–	–	●
External doors, opening outwards		–	–	–
Non-handed		●	●	●
Arm type standard scissor arm		●	●	●
Closing force variable at adjustment screw		–	–	–
Closing speed variable by valve adjustment		●	●	●
Backcheck		○	○	○
Delayed action		–	–	–
Hold-open		○	○	○
Weight in kg		1.7	1.7	1.7
Dimensions in mm	Length	180		
	Overall depth	65		
	Height	43		

● Yes – no ○ Option

Specification text

Rack-and-pinion door closer with hydraulically fully controlled closing cycle, non-handed.

Model:



- ☐ Size 2
- ☐ Size 3
- ☐ Size 4
- ☐ With hold-open arm

Accessories: _____

Closer Colour:


- ☐ silver

Make: DORMA TS 77

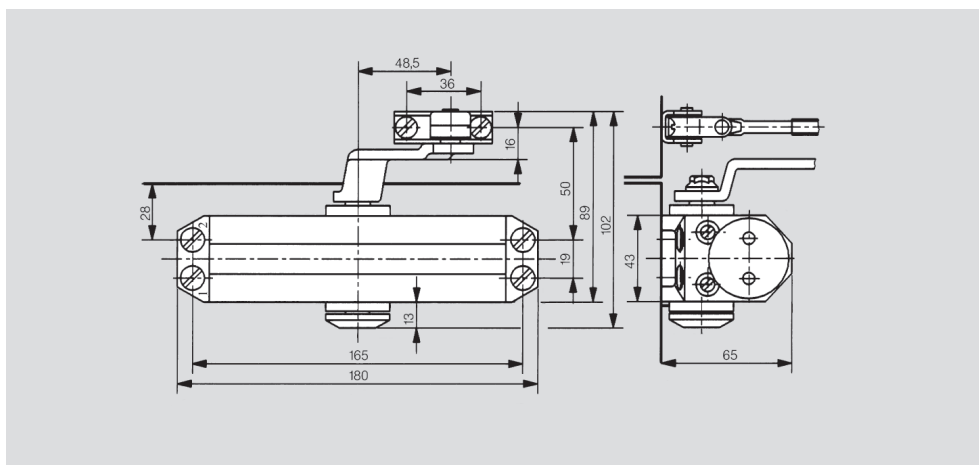


ON THE PULL SIDE

Door leaf fixing (standard)




ON THE PUSH SIDE

Transom fixing
(overhead installation)



WITH HOLD-OPEN ARM
ASSEMBLY

for temporary door hold-open
(optional extra)

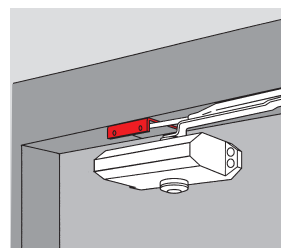

PARALLEL ARM

for parallel arm assembly
(for installation dimensions,
see fixing instructions)



DORMA Australia P/L
Head Office
46-52 Abbott Road,
Hallam, Victoria 3803
Telephone (03) 8795 0666
Facsimile (03) 8795 0280
Toll Free Facsimile
1800 333 309

DORMA NZ Limited
Head Office
Building P
61-69 Patiki Road
Avondale
Auckland 1026
Telephone (09) 830 2052
Facsimile (09) 820 4909